




- Lift unit for pallets ISO - MAX 1000

• Double hinged doors serv. at floor level • Loading front and rear • Machine above • WITH SAFETY GEAR

Well dimensions are absolute min. plumbed dimensions

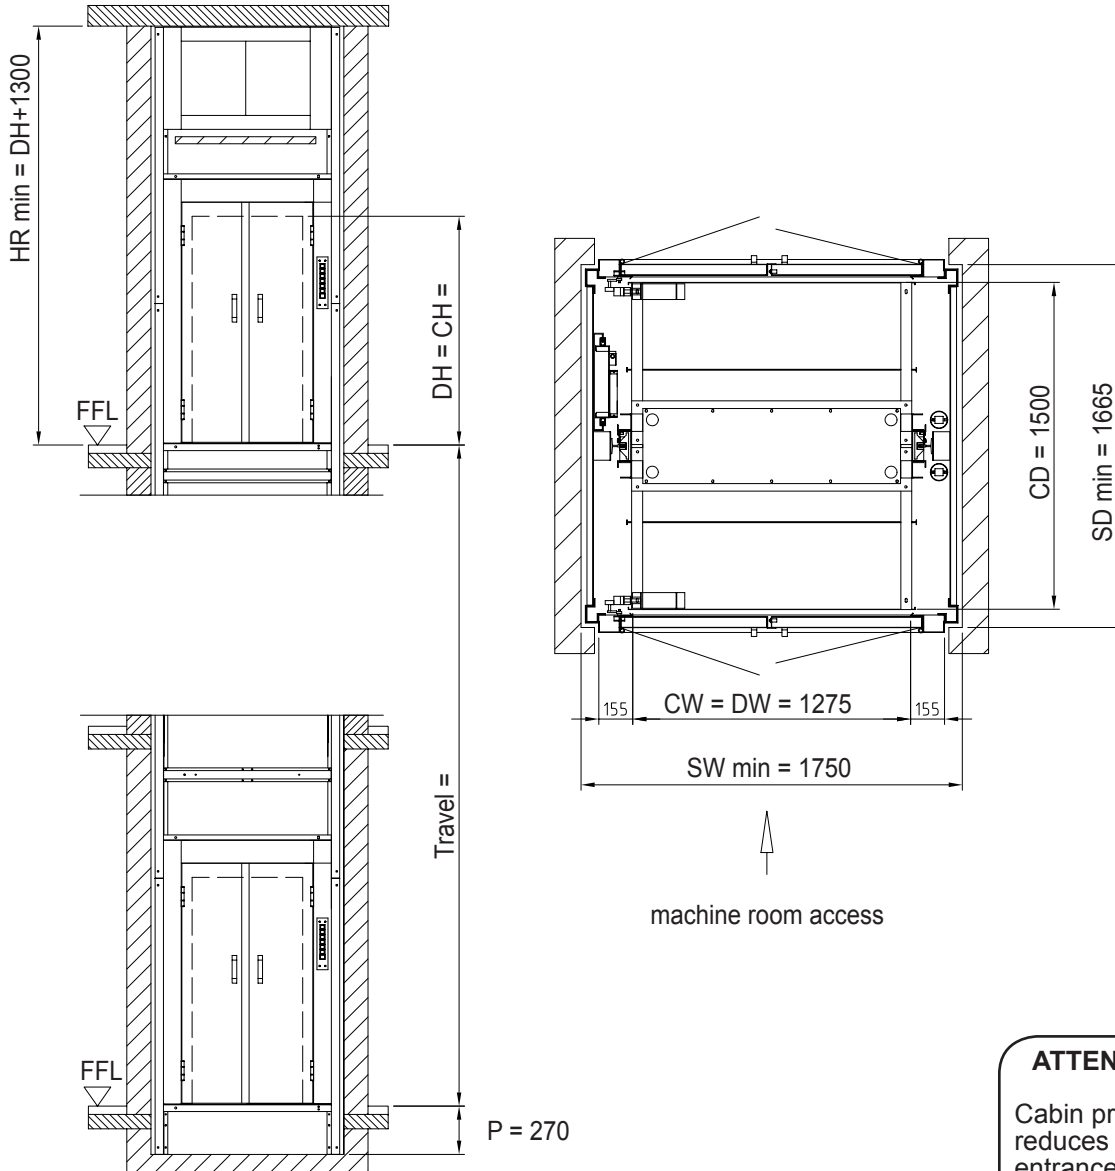

ATTENTION:

Cabin protection reduces clear entrance openings resp. shaft sizes (see part 10)

Shaft floor to be constructed according to layout drawing

Cabin height available in increments of 100 mm

CW	=	cabin width	1275 mm
CD	=	cabin depth	1500 mm
CH	=	cabin height	min. 1200 - max. 2000 mm
DW	=	door width	= Cabin width
DH	=	door height	= Cabin height
P	=	pit	= min. 270 mm
SW	=	Shaft width	= plumbed min. dimensions
SD	=	Shaft depth	= plumbed min. dimensions
HR	=	Headroom	= clear height of top floor FFL - underside ceiling
FFL	=	finished floor level	



Prices and specification see back side