

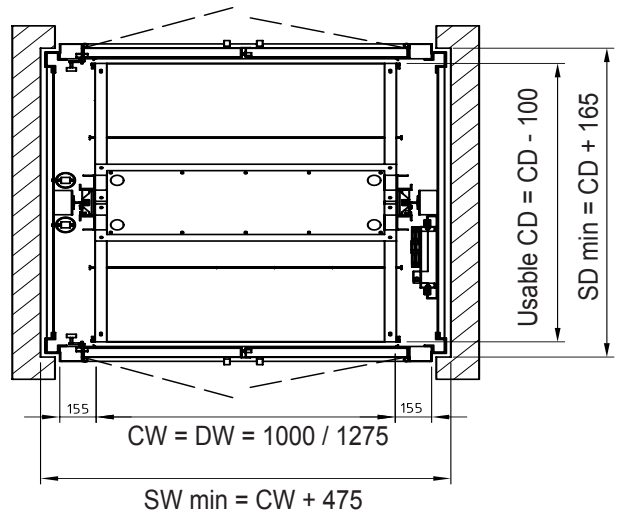
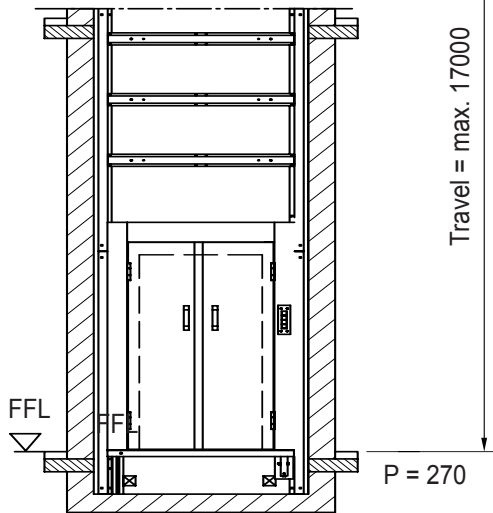


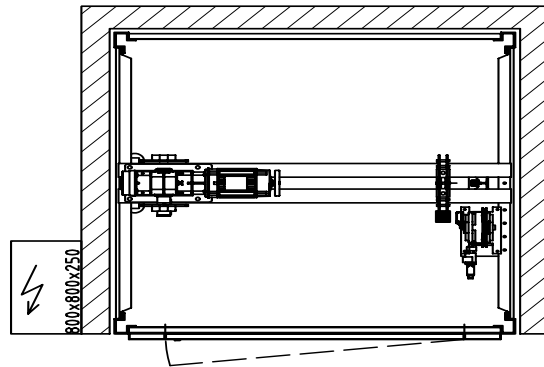

# Goodslift ISO - PM 1000

• Hinged doors serving at floor level • Loading front and rear • Machine above • WITH SAFETY GEAR

**WITH PASSENGER TRANSPORT**

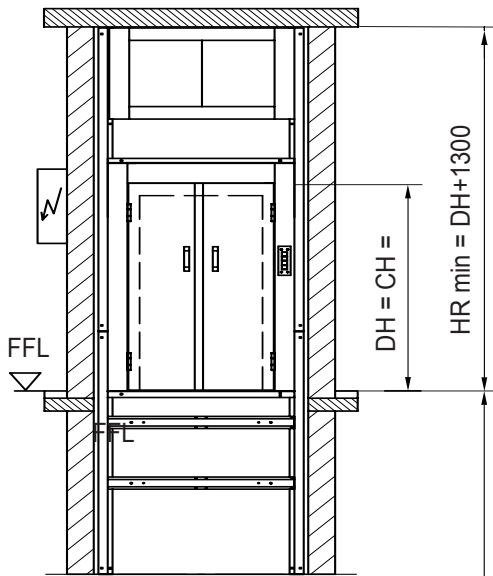

### Shaft floor to be constructed according to layout drawing

Cabin height available in increments of 100 mm

If DW = 1000 mm then doors single hinged  
If DW = 1275 mm then doors double hinged

- |      |      |                      |   |   |      |      |      |
|------|------|----------------------|---|---|------|------|------|
| CW   | =    | cabin width          | = | <table border="1"><tr><td>1000</td><td>1275</td><td>1275</td></tr></table> mm | 1000 | 1275 | 1275 |
| 1000 | 1275 | 1275                 |   |   |      |      |      |
| CD   | =    | cabin depth          | = | <table border="1"><tr><td>1400</td><td>1500</td><td>1800</td></tr></table> mm | 1400 | 1500 | 1800 |
| 1400 | 1500 | 1800                 |   |   |      |      |      |
| CH   | =    | cabin height         | = | 2000 - 2200 mm  |      |      |      |
| DW   | =    | door width           | = | Cabin width   |      |      |      |
| DH   | =    | door height          | = | Cabin height  |      |      |      |
| P    | =    | pit                  | = | min. 270 mm   |      |      |      |
| SW   | =    | Shaft width          | = | plumbed min. dimensions   |      |      |      |
| SD   | =    | Shaft depth          | = | plumbed min. dimensions   |      |      |      |
| HR   | =    | Headroom             | = | clear height of top floor FFL - underside ceiling                             |      |      |      |
| FFL  | =    | finished floor level | = |   |      |      |      |

